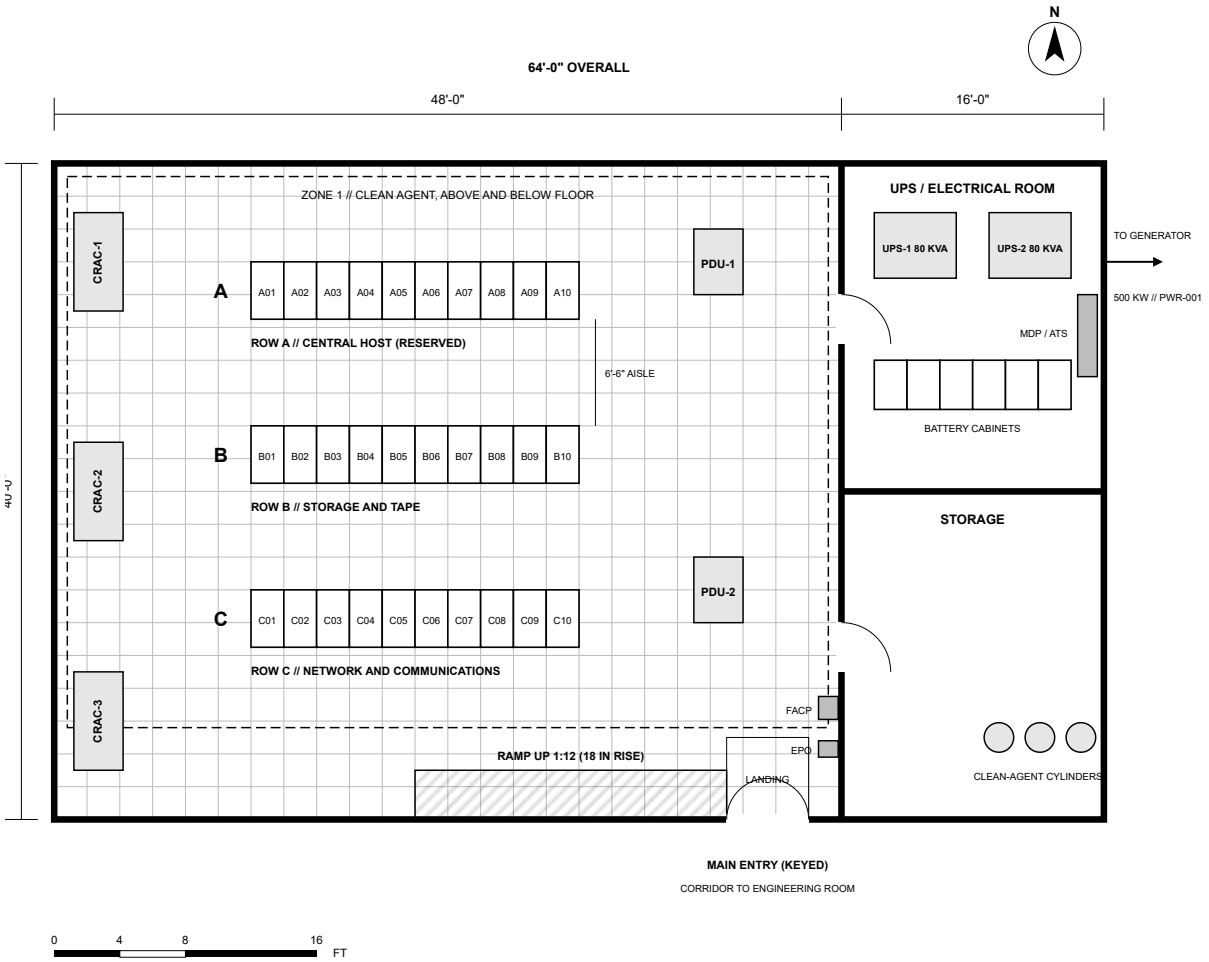


PLAN VIEW AT RAISED FLOOR // SCALE: 1/8 IN = 1 FT (NOMINAL)

SUPERSEDED
SEE REGISTER FOR CURRENT REVISION

REVISIONS

REV	DATE	DESCRIPTION	BY	APPR
A	31 JUL 1996	Initial issue. Machine room from the Engineering Room plan: 18 in raised floor, rows A-C, three downflow cooling units, UPS room, clean-agent suppression zones.	MK	MV

NOTES

1. Raised floor 18 in above slab, 24 x 24 in tiles. Grid shown in the machine room only.
2. Cabinet positions only. Cabinets 24 in wide x 42 in deep. Equipment per RCK series.
3. Rows A-C planned. Row A reserved for the central host (delivery 1997).
4. Cooling: three downflow units, see MEC-001.
5. Power: UPS, distribution and generator, see PWR-001.
6. Clean-agent zone covers the room above and below the raised floor. Cylinders in the storage room.
7. Machine room entry keyed. See SEC-001.
8. Dimensions in feet and inches, to finished wall face.

LEGEND

- Cabinet position
- Floor-standing equipment
- Suppression zone boundary
- Wall-mounted panel

NEXUS // ENGINEERING

MACHINE ROOM FLOOR PLAN, SITE A

DRAWING NO.	REV	SHEET
FLR-001	A	1 OF 1

DRAWN	CHECKED	APPROVED
M. KEENE	V. HALE	M. VOSS

DATE	SERIES
31 JUL 1996	FACILITY

CONTROLLED DOCUMENT // CUSTODIAN: ENGINEERING / MAINTENANCE // DO NOT SCALE