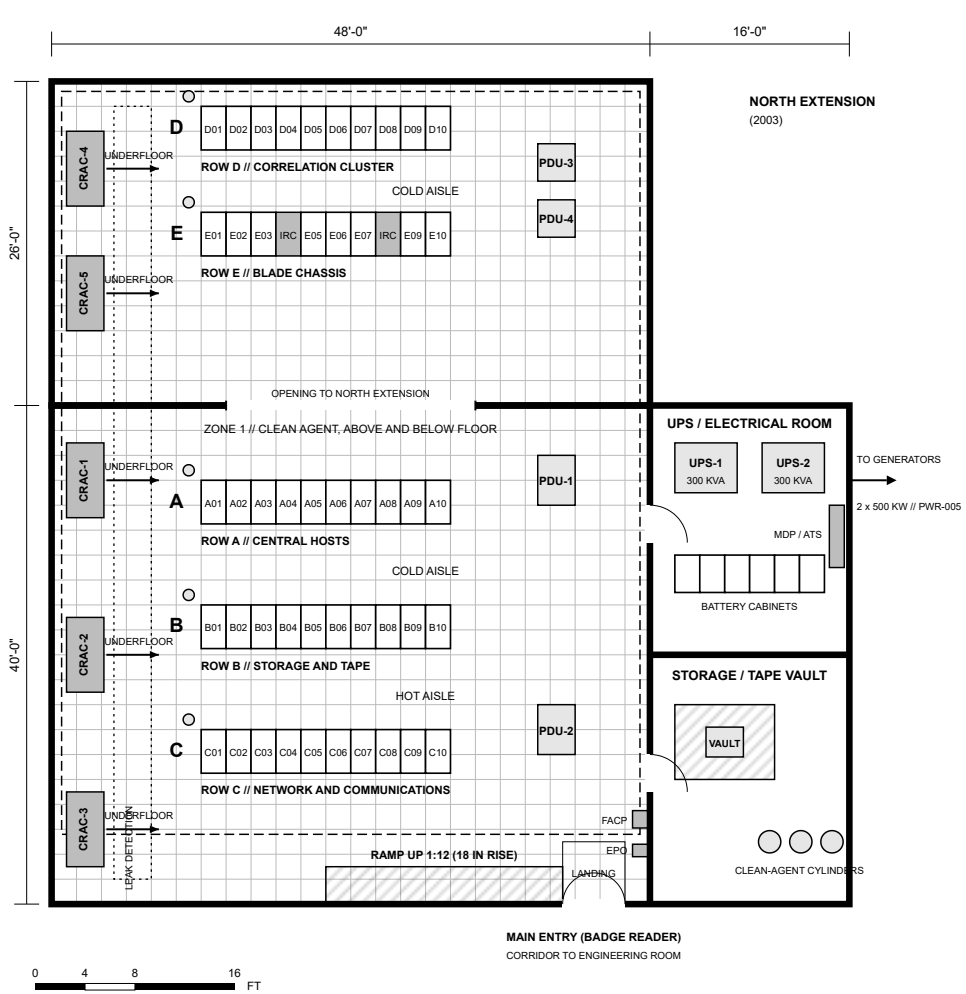


COOLING PLAN // SCALE: NOMINAL

SUPERSEDED
SEE REGISTER FOR CURRENT REVISION

REVISIONS

REV	DATE	DESCRIPTION	BY	APPR
C	14 AUG 2006	In-row cooling for row E.	JH	CD
B	18 OCT 2004	Two cooling units added for hot and cold aisles.		
A	03 SEP 1996	Initial issue. Three downflow cooling units, leak detection, temperature and humidity sensors.		

NOTES

1. Downflow cooling units supply air under the raised floor. Units: 5.
2. Rows set hot aisle / cold aisle. Perforated tiles in cold aisles only.
3. In-row cooling units (IRC) in row E.
4. Leak detection cable under the floor along the cooling units.
5. Temperature and humidity sensor at the end of each row (circle).
6. Floor plan per FLR-001. Power per PWR-001.

LEGEND

- Cabinet position
- Floor-standing equipment
- Suppression zone boundary
- Wall panel / special cabinet
- Supply airflow
- Leak detection cable

OER // ENGINEERING

COOLING AND ENVIRONMENTAL SYSTEMS, SITE A

DRAWING NO.	REV	SHEET
MEC-001	C	1 OF 1

DRAWN	CHECKED	APPROVED
J. HOLLOWAY	T. MERCER	C. DOYLE

DATE	SERIES
14 AUG 2006	FACILITY

CONTROLLED DOCUMENT // CUSTODIAN: ENGINEERING / MAINTENANCE // DO NOT SCALE