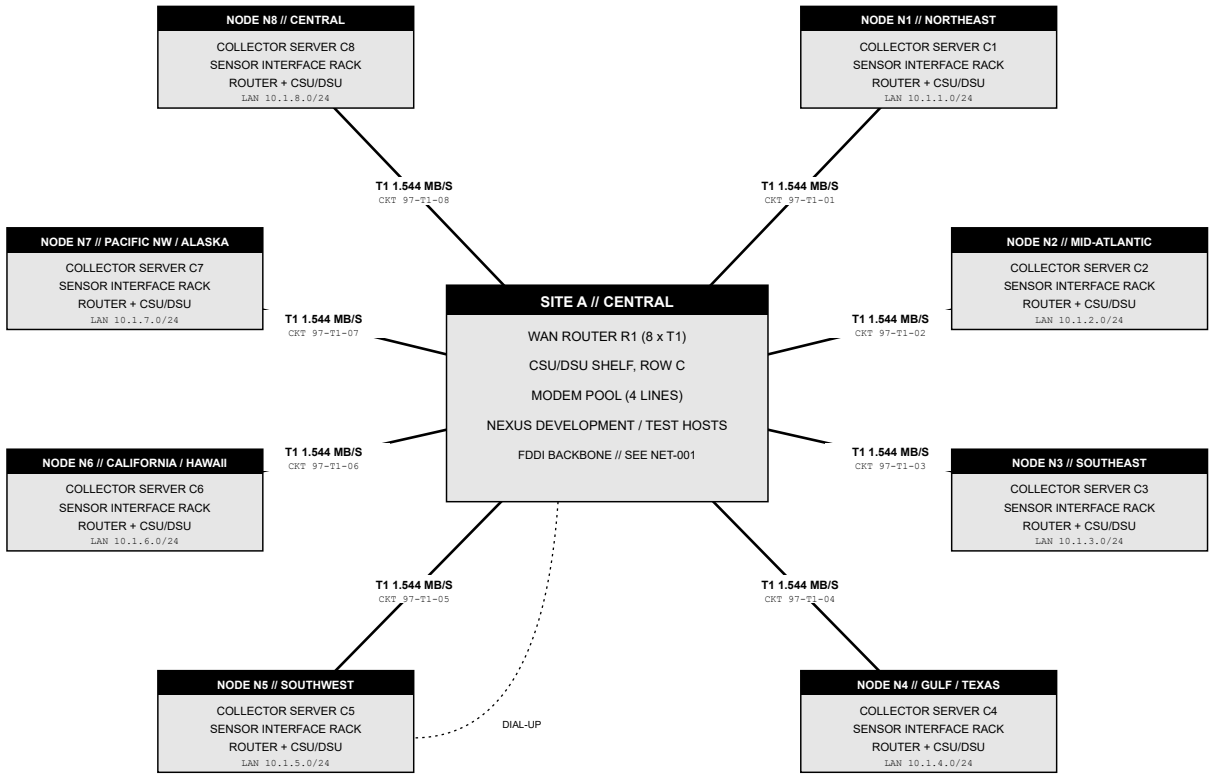


SITE A HUB, EIGHT REGIONAL NODES. NODE POSITIONS ARE SCHEMATIC, NOT GEOGRAPHIC.

LOGICAL TOPOLOGY // SCALE: NONE

SUPERSEDED
SEE REGISTER FOR CURRENT REVISION

REVISIONS

REV	DATE	DESCRIPTION	BY	APPR
A	06 FEB 1997	Initial issue. T1 (1.5 Mb/s) links to nodes N1-N8 for acceptance testing.	NB	MV

NOTES

1. Configuration for acceptance testing. Eight leased T1 circuits, 1.544 Mb/s each, point to point from Site A.
2. Each node: collector server, sensor interface rack, router and CSU/DSU in the node collector room. See NODE-001.
3. Site A: WAN router R1 and CSU/DSU shelf in row C. Router connects to the FDDI backbone, see NET-001.
4. Node LANs 10.1.n.0/24 (n = node number). WAN links 10.0.0.0/30 per circuit.
5. Collected data is spooled at the node and transferred to Site A on schedule. Transfer rules per SWA-002 (in preparation).
6. Dial-up modem pool at Site A for spool recovery when a circuit is down (manual).
7. Circuit IDs as issued by the carrier are kept in INV-002.

LEGEND

- Leased T1 circuit
- Dial-up (spool recovery)
- Site or node

NEXUS // ENGINEERING

WIDE AREA NETWORK (INTER-SITE)

DRAWING NO.	REV	SHEET
NET-002	A	1 OF 1

DRAWN	CHECKED	APPROVED
N. BELL	E. TRENT	M. VOSS

DATE	SERIES
06 FEB 1997	NETWORK

CONTROLLED DOCUMENT // CUSTODIAN: ENGINEERING / MAINTENANCE // DO NOT SCALE