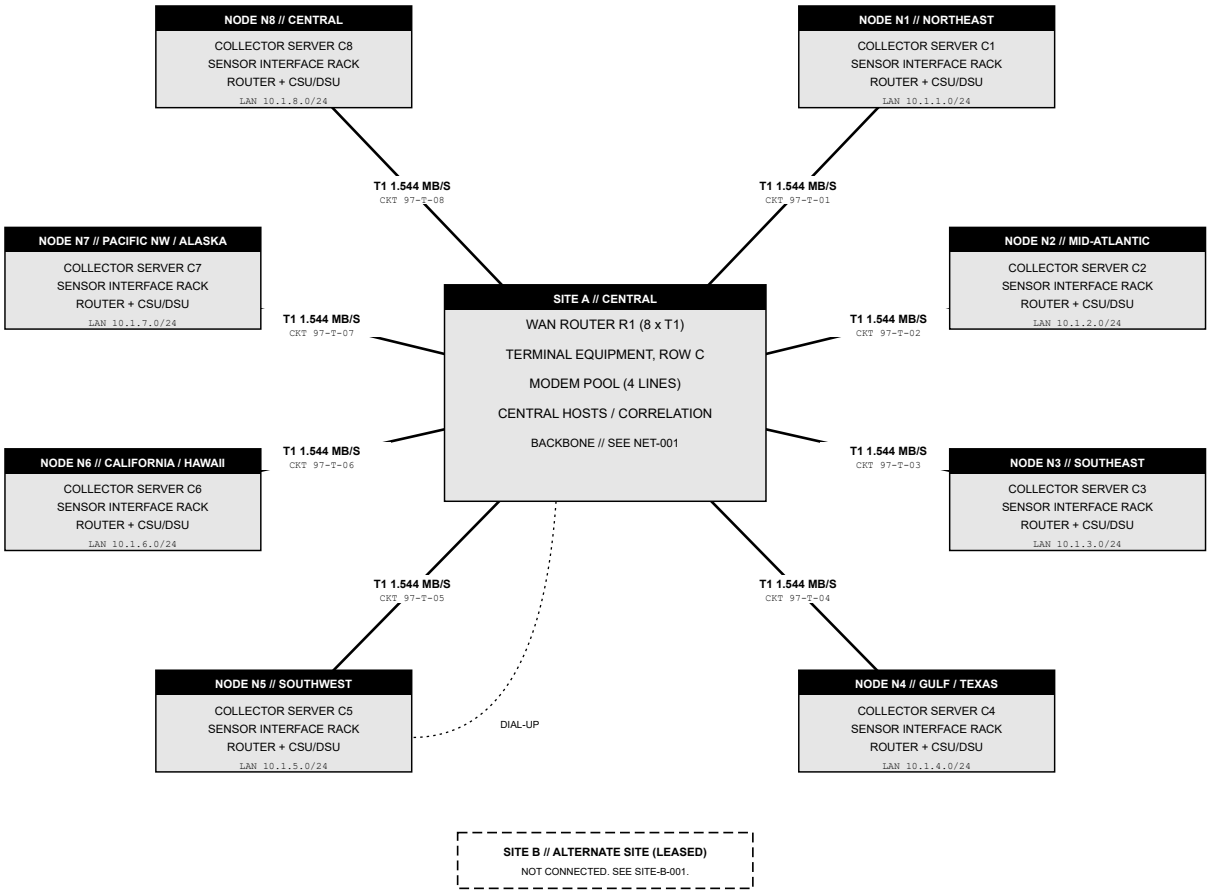


SITE A HUB, EIGHT REGIONAL NODES. NODE POSITIONS ARE SCHEMATIC, NOT GEOGRAPHIC.

LOGICAL TOPOLOGY // SCALE: NONE

SUPERSEDED
SEE REGISTER FOR CURRENT REVISION

REVISIONS

REV	DATE	DESCRIPTION	BY	APPR
B	13 OCT 1997	Regional link test configuration.	NB	MV
A	06 FEB 1997	Initial issue. T1 (1.5 Mb/s) links to nodes N1-N8 for acceptance testing.		

NOTES

1. Node circuits: T1 1.544 MB/S.
2. Each node: collectors, sensor interfaces and communications equipment in the node collector room. See NODE-001.
3. Site A terminal equipment in row C. Backbone per NET-001.
4. Site B leased, not yet connected.
5. Node LANs 10.1.n.0/24 (n = node number).
6. Collected data is spooled at the node and transferred to Site A on schedule. Transfer rules per SWA-002 (in preparation).
7. Dial-up modem pool at Site A for spool recovery when a circuit is down (manual).
8. Circuit IDs as issued by the carrier are kept in INV-002.

LEGEND

- Leased circuit
- Wavelength / high capacity
- Dial-up (spool recovery)
- Site or node

NEXUS // ENGINEERING

WIDE AREA NETWORK (INTER-SITE)

DRAWING NO.	REV	SHEET
NET-002	B	1 OF 1

DRAWN	CHECKED	APPROVED
N. BELL	E. TRENT	M. VOSS

DATE	SERIES
13 OCT 1997	NETWORK

CONTROLLED DOCUMENT // CUSTODIAN: ENGINEERING / MAINTENANCE // DO NOT SCALE