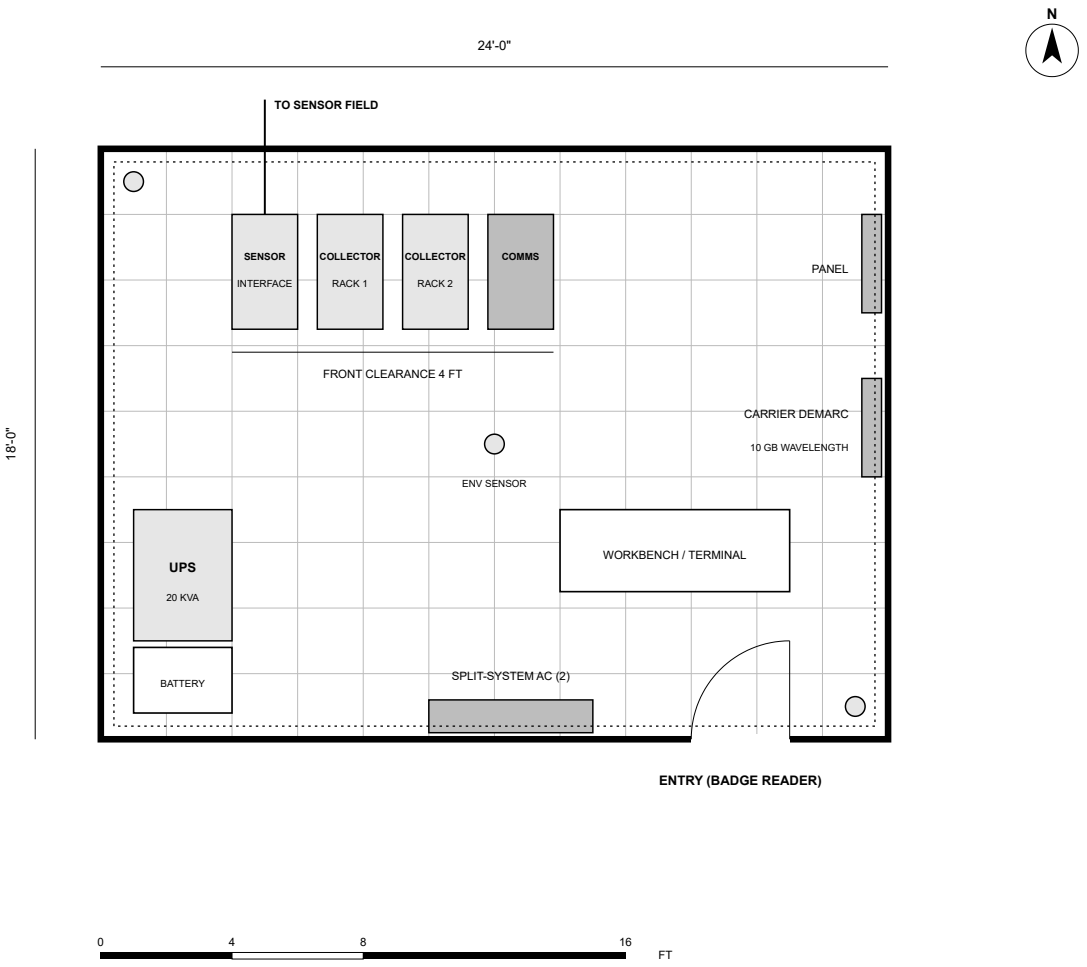


PLAN VIEW, TYPICAL NODE // SCALE: 1/4 IN = 1 FT (NOMINAL)

SUPERSEDED
SEE REGISTER FOR CURRENT REVISION

REVISIONS

REV	DATE	DESCRIPTION	BY	APPR
D	07 APR 2014	Wavelength equipment. Environmental monitoring.	EV	MG
C	16 FEB 2004	Second collector rack. OC-3 terminal equipment.		
B	01 JUN 1998	As built, all eight nodes.		
A	07 NOV 1996	Initial issue. Collector room, sensor interface rack, communications rack, UPS.		

NOTES

1. All eight nodes (N1-N8) built to this layout. Site differences recorded in the node logbook.
2. Collector room in leased or owned space near the regional sensor field. Sensor field cabling enters at the north wall.
3. Racks: sensor interface, collector (2), communications. Equipment per INV-002.
4. Communications rack: 10 GB WAVELENGTH link to Site A (NET-002).
5. UPS 20 kVA, at least 4 h at node load. No generator; utility outage longer than the UPS is recovered from the node spool.
6. Environmental monitoring: temperature, water and door sensors reported to Site A.
7. Unstaffed. Visits by Site A engineering per the maintenance schedule.

LEGEND

- Rack / equipment
- Communications / wall panel
- Environmental sensor

OER // ENGINEERING

REGIONAL NODE STANDARD LAYOUT (N1-N8)

DRAWING NO.	REV	SHEET
NODE-001	D	1 OF 1

DRAWN	CHECKED	APPROVED
E. VASQUEZ	M. REED	M. GRANT

DATE	SERIES
07 APR 2014	SITES

CONTROLLED DOCUMENT // CUSTODIAN: ENGINEERING / MAINTENANCE // DO NOT SCALE