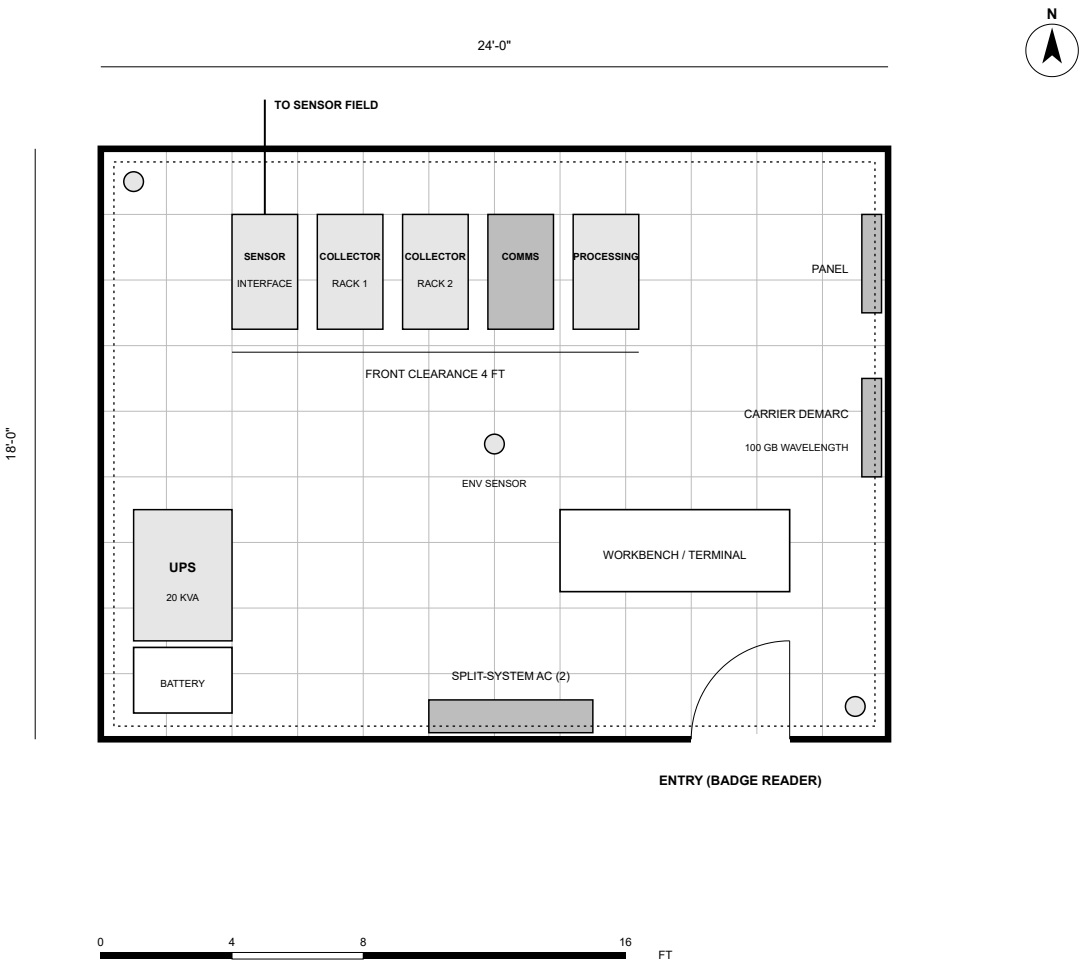


PLAN VIEW, TYPICAL NODE // SCALE: 1/4 IN = 1 FT (NOMINAL)

REVISIONS

REV	DATE	DESCRIPTION	BY	APPR
E	16 SEP 2024	Node processing rack.	TR	AC
D	07 APR 2014	Wavelength equipment. Environmental monitoring.		
C	16 FEB 2004	Second collector rack. OC-3 terminal equipment.		
B	01 JUN 1998	As built, all eight nodes.		
A	07 NOV 1996	Initial issue. Collector room, sensor interface rack, communications rack, UPS.		

NOTES

1. All eight nodes (N1-N8) built to this layout. Site differences recorded in the node logbook.
2. Collector room in leased or owned space near the regional sensor field. Sensor field cabling enters at the north wall.
3. Racks: sensor interface, collector (2), communications, processing. Equipment per INV-002.
4. Communications rack: 100 GB WAVELENGTH link to Site A (NET-002), link encryptor.
5. UPS 20 kVA, at least 4 h at node load. No generator; utility outage longer than the UPS is recovered from the node spool.
6. Environmental monitoring: temperature, water and door sensors reported to Site A.
7. Processing rack: collected data processed at the node before transfer (SWA-002).
8. Unstaffed. Visits by Site A engineering per the maintenance schedule.

LEGEND

- Rack / equipment
- Communications / wall panel
- Environmental sensor

OER // ENGINEERING

REGIONAL NODE STANDARD LAYOUT (N1-N8)

DRAWING NO.	REV	SHEET
NODE-001	E	1 OF 1

DRAWN	CHECKED	APPROVED
T. REED	R. KIM	A. COLE

DATE	SERIES
16 SEP 2024	SITES

CONTROLLED DOCUMENT // CUSTODIAN: ENGINEERING / MAINTENANCE // DO NOT SCALE