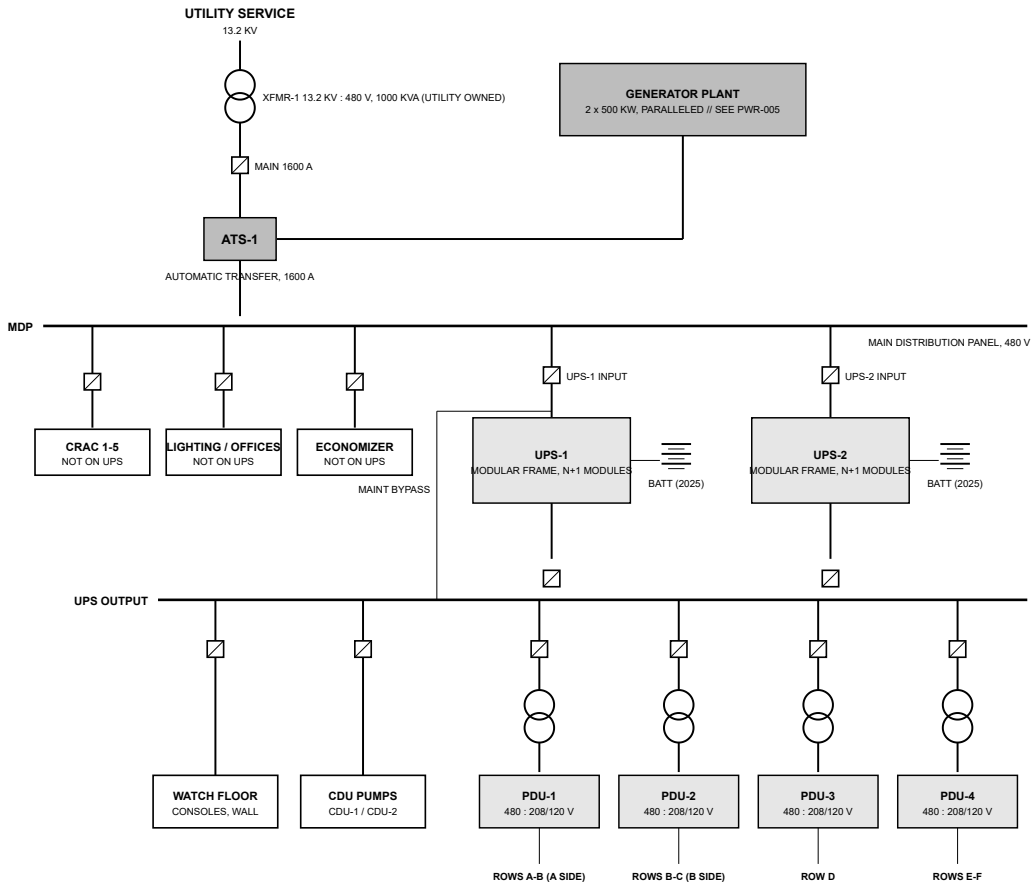



ONE-LINE DIAGRAM. NOT TO SCALE. CABLE SIZES PER PANEL SCHEDULES.

**ONE-LINE DIAGRAM // SCALE: NONE**

## REVISIONS

| REV | DATE | DESCRIPTION | BY | APPR |
|---|---|---|---|---|
| J | 10 MAR 2025 | UPS battery strings replaced. | SW | AC |
| H | 24 FEB 2020 | Row F circuits. Cooling pumps on UPS. | | |
| G | 14 NOV 2016 | Modular UPS frames. | | |
| F | 21 JUL 2008 | Row E circuits. | | |
| E | 16 MAY 2005 | Second generator. Generator plant moved to PWR-005. | | |
| D | 09 AUG 2004 | 2 x 300 kVA UPS replace the 80 kVA units. | | |
| C | 04 OCT 1999 | Generator fuel capacity raised. Load bank connection. | | |
| B | 30 JUN 1997 | As built. Distribution circuits for rows A-C. | | |
| A | 03 SEP 1996 | Initial issue. Utility feed, 500 kW diesel generator, automatic transfer switch, 2 x 80 kVA UPS. | | |

## NOTES

1. Utility service 13.2 kV, transformer owned by the utility. Service entrance 480 V, 1600 A.
2. Generator plant and paralleling switchgear per PWR-005.
3. UPS: MODULAR, 2 FRAMES. Battery runtime at least 10 min at full load. Battery strings replaced 2025.
4. Cooling units, lighting and offices on generator-backed power, not on UPS. Liquid cooling pumps (CDU-1/2) on UPS.
5. Each cabinet fed from two PDUs (A and B side). Positions per FLR-001.
6. Emergency power off (EPO) at the machine room entry trips all UPS outputs and cooling.

## LEGEND

- Generator
- Circuit breaker
- Transformer
- Bus
- Transfer switch / switchgear
- Future / provision only

**OER // ENGINEERING**

# POWER ONE-LINE DIAGRAM, SITE A

| DRAWING NO. | REV | SHEET |
|---|---|---|
| PWR-001 | J | 1 OF 1 |

| DRAWN | CHECKED | APPROVED |
|---|---|---|
| S. WALSH | R. KIM | A. COLE |

| DATE | SERIES |
|---|---|
| 10 MAR 2025 | POWER |

CONTROLLED DOCUMENT // CUSTODIAN: ENGINEERING / MAINTENANCE // DO NOT SCALE