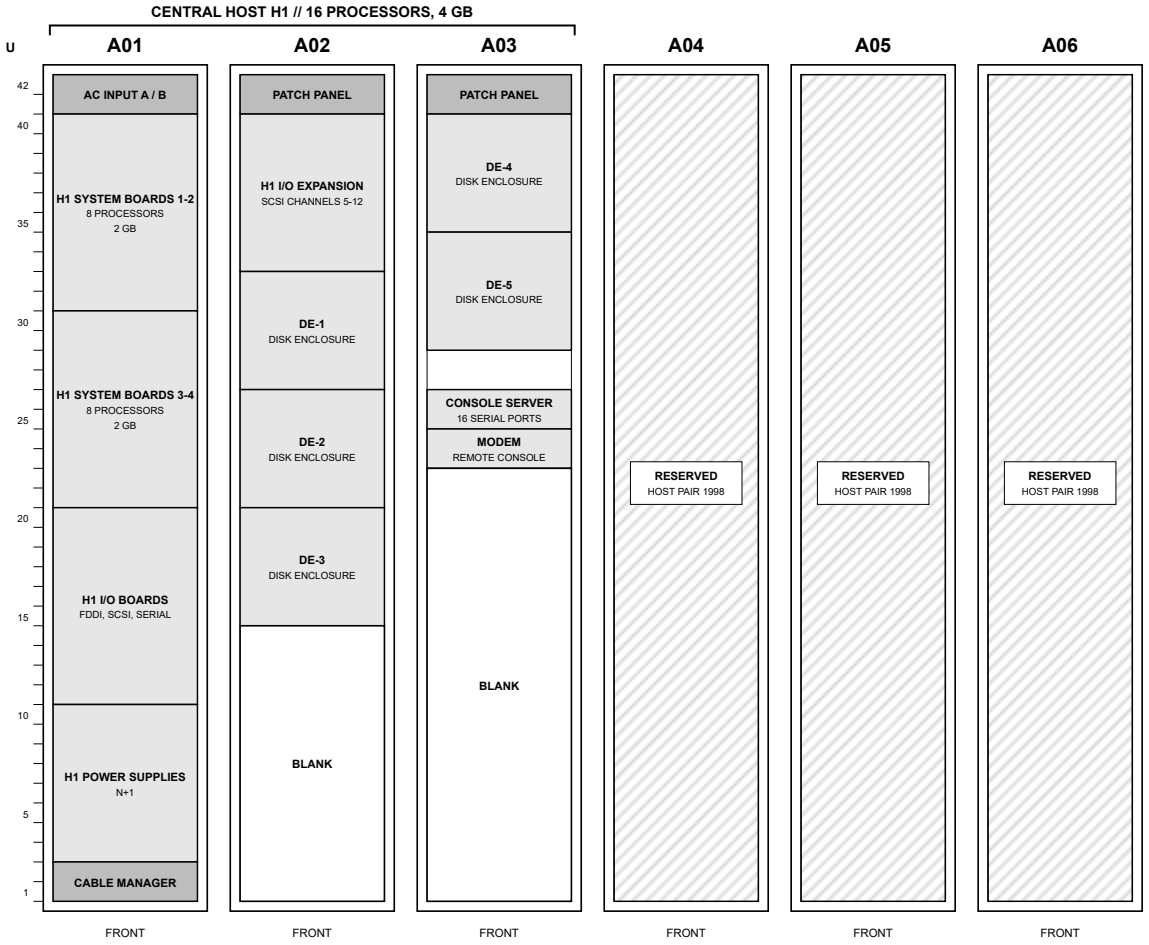


FRONT ELEVATIONS, ROW A // SCALE: NONE

SUPERSEDED
SEE REGISTER FOR CURRENT REVISION

REVISIONS

REV	DATE	DESCRIPTION	BY	APPR
A	03 JUL 1997	Initial issue. A01-A03: central host, 16 processors, 4 GB, with disk enclosures.	MK	MV

NOTES

1. Cabinets 42U, 24 in wide x 42 in deep, front view. Positions per FLR-001.
2. A01-A03: central host H1, 16 processors, 4 GB memory, delivered and installed this revision.
3. Disk enclosures DE-1 to DE-5: RAID-5, about 200 GB usable in total. Tape library in row B, see RCK-02.
4. Each cabinet fed from PDU-1 (A side) and PDU-2 (B side). Host power supplies split across both feeds. See PWR-001.
5. System console on the console server in A03. No local monitor in the machine room.
6. A04-A06 reserved for the host pair (1998). A07-A10 reserved, not shown.
7. Blank panels in all empty spaces (airflow).
8. Floor loading: A01 about 1,400 lb. Check tile rating before moving.

LEGEND

- Installed equipment
- Power / cabling
- Blank panel
- Reserved

NEXUS // ENGINEERING

RACK ELEVATIONS, ROW A (CENTRAL HOSTS)

DRAWING NO.	REV	SHEET
RCK-01	A	1 OF 1

DRAWN	CHECKED	APPROVED
M. KEENE	W. PIKE	M. VOSS

DATE	SERIES
03 JUL 1997	RACKS

CONTROLLED DOCUMENT // CUSTODIAN: ENGINEERING / MAINTENANCE // DO NOT SCALE