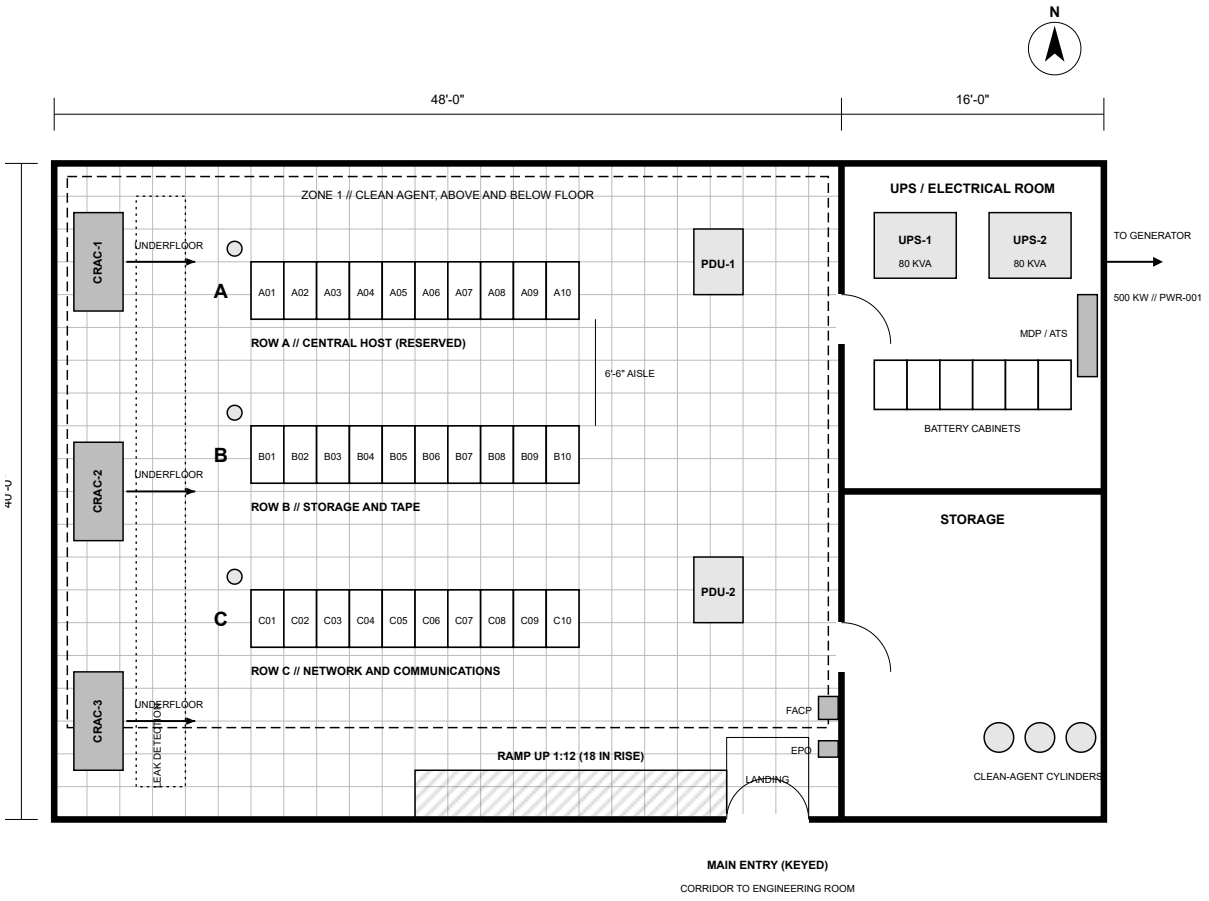


COOLING PLAN // SCALE: NOMINAL

SUPERSEDED
SEE REGISTER FOR CURRENT REVISION

REVISIONS

REV	DATE	DESCRIPTION	BY	APPR
A	03 SEP 1996	Initial issue. Three downflow cooling units, leak detection, temperature and humidity sensors.	MK	MV

NOTES

1. Downflow cooling units supply air under the raised floor. Units: 3.
2. Perforated tiles in front of cabinets.
3. Leak detection cable under the floor along the cooling units.
4. Temperature and humidity sensor at the end of each row (circle).
5. Floor plan per FLR-001. Power per PWR-001.

LEGEND

- Cabinet position
- Floor-standing equipment
- Suppression zone boundary
- Wall panel / special cabinet
- Supply airflow
- Leak detection cable

NEXUS // ENGINEERING

COOLING AND ENVIRONMENTAL SYSTEMS, SITE A

DRAWING NO.	REV	SHEET
MEC-001	A	1 OF 1

DRAWN	CHECKED	APPROVED
M. KEENE	V. HALE	M. VOSS

DATE	SERIES
03 SEP 1996	FACILITY

CONTROLLED DOCUMENT // CUSTODIAN: ENGINEERING / MAINTENANCE // DO NOT SCALE